



## SPEC SHEET

### PRODUCT DESCRIPTION

- Backlit mirror
- Plexiglass diffuser
- 3 color light switch + dimming function
- Antifog function
- 5mm thick high quality copper free mirror
- Hard-wired electrical installation
- Connection to a light switch is optional (not intended for use with dimmers)
- LED life is 50,000 hours
- Features 3000K, 5000K, and 7000K color temperatures
- CRI 80+
- Two year manufacturer warranty
- Solid Aluminum frame
- ETL and IP44 rated and certified (LED, drivers, and switches)
- Aluminum french cleat mounting system allows for horizontal or vertical installation

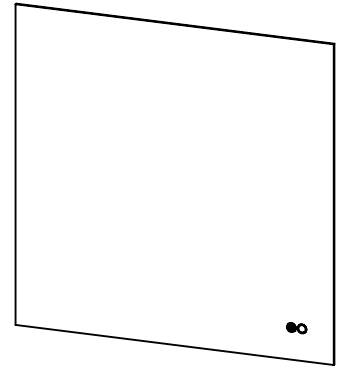


### ROUGHING-IN DIMENSIONS

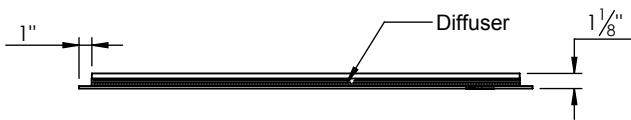


**TOP VIEW**

Model #	Width	Total Wattage
IM10824-10	23 3/4"	65 W
IM10830-10	29 1/2"	75 W
IM10836-10	35 1/2"	85 W
IM10848-10	47 1/4"	105 W
IM10860-10	59 1/4"	135 W
IM10872-10	71 1/4"	160 W

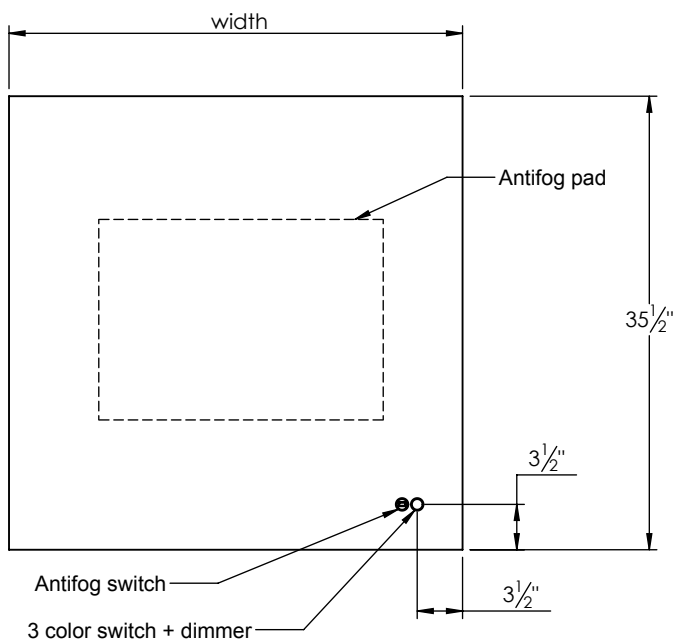

**FRONT VIEW**

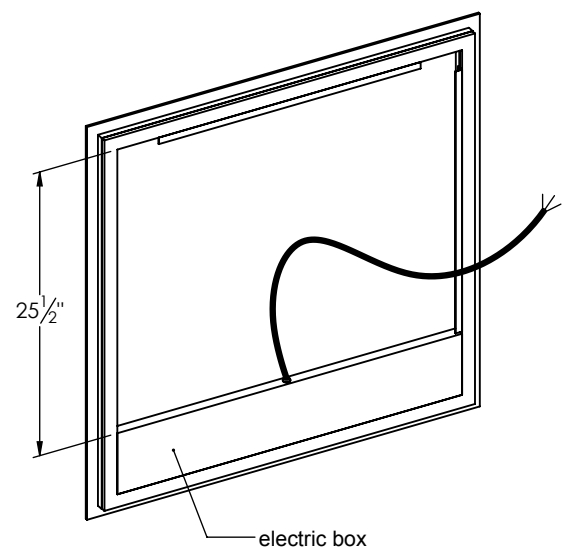

**REAR VIEW**