


SPEC SHEET

PRODUCT DESCRIPTION

- LED mirror with front and back lighting
- Features two touchless infrared motion sensors for LED activation
- 5mm thick high quality copper free mirror
- Hard-wired electrical installation
- Connection to a light switch is optional (not intended for use with dimmers)
- LED intensity is 65 FC (foot candle) at standard user distance
- LED life is 50,000 hours
- 6000K color temperature (neutral white)
- CRI 80+
- Two year manufacturer warranty
- Solid Aluminum frame
- UL and IP44 rated and certified (LED, drivers, and switches)
- Aluminum french cleat mounting system
- Allows for horizontal or vertical installation



ROUGHING-IN DIMENSIONS

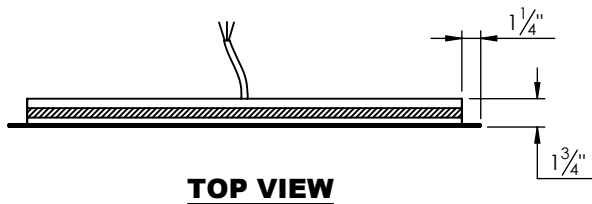

Model #	Width	Total Wattage
IM8824-15	23 3/4"	75 W
IM8830-15	29 1/2"	85 W
IM8836-15	35 1/2"	95 W
IM8848-15	47 1/4"	115 W
IM8860-15	59 1/4"	135 W
IM8872-15	71 1/4"	155 W

