

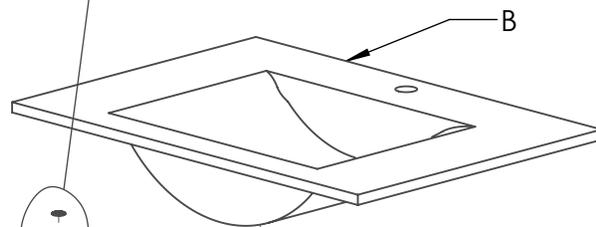


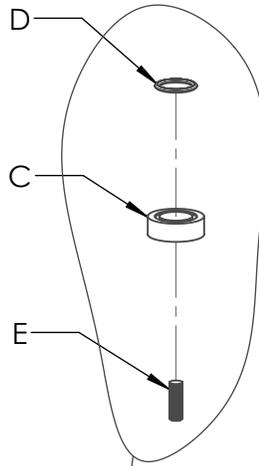


1. Screw rubber feet(F) into bottom of cabinet(A) legs.
2. Screw threaded rods(E) into glass supports(C) and then into the holes found on the top of cabinet (A). See fig #1.
3. Place the rubber rings (D) on the grooves of glass supports(C). See fig #1.
4. Remove the knobs/handles from the back of doors/drawers and re-attach them towards the front of cabinet (A). See fig #1.
5. After installing the faucet and drain, place the counter top (B) over the rubber rings (D). See fig #1. If using porcelain or quartz stone, use liquid nail to attach the counter top to cabinet.
6. Level the glass supports if necessary.
7. Apply clear silicone in between the finished wall and the back of counter top (B). See finished view.

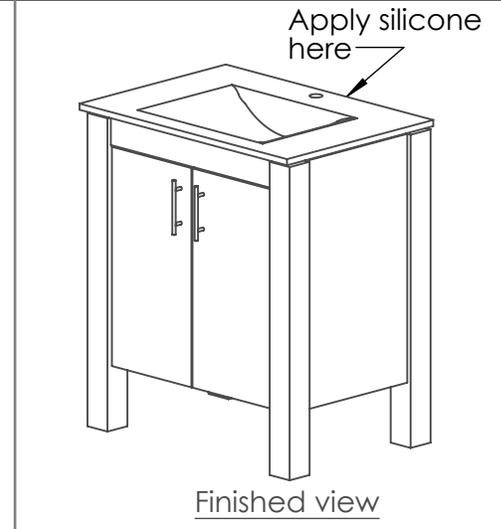


DO NOT USE GLASS SUPPORTS (PART C, D, & E) IF USING PORCELAIN OR QUARTZ COUNTER TOP

PARTS



A x 1
Cabinet



B x 1
Counter top



C x 4
Glass support



D x 4
Rubber ring



E x 4
Threaded rod



F x 4
Rubber feet

Machine screw

Handle

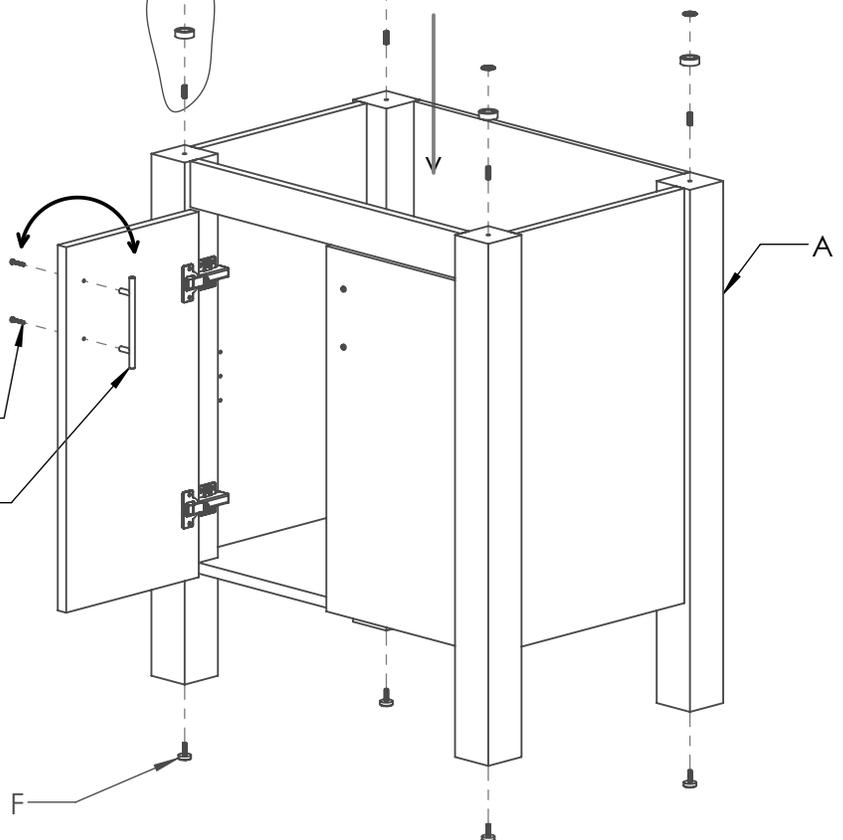


Figure #1



1. Prepare counter top for installation by placing it upside down on a smooth surface.
2. Place undermount basin (SOLD SEPARATELY) in the final position and make a mark around it using a marker.
3. Apply stone adhesive (liquid nail or similar) on the top edge of basin. See fig 1.
4. Attach basin to counter top using the threaded rods, L brackets, flat washers, spring washers, and wing nuts as shown in fig 1. Do not fully tight the wing nut at this step.
5. Use previous marking to align basin in the final position
6. Tighten wing nut and let adhesive dry.
7. If necessary, apply caulking in the inside of basin where it meets with the counter top.

